

# CLEAR UNREINFORCED PVC HOSE C Series

# Copely



Clear PVC hose suitable for both low pressure food and industrial applications. It is manufactured from the highest quality, low-toxic materials to give excellent clarity, flexibility and durability over a wide temperature range.

## Key Features:

- Glass clear transparency for easy visibility.
- Excellent abrasion and corrosion properties for increased durability.
- Good flexibility for ease of use.
- Manufactured from cadmium and silicone-free materials using a special low toxic, odourless PVC formulation that can reduce the taint of drinking water.
- EU No.10/2011 compliant for food contact applications.
- RoHS 3 compliant.
- Suitable for use with alcohol, petrol, oils, greases and solvents.
- Highly resistant to a wide range of acids and alkalis.
- Service temperature = -15°C to + 60°C.
- NSF51 + NSF61 approved for the transfer of drinking water.


## Sizes:

Available in 30 m coils - 3 mm-50 mm ID

## Colours:

Clear

Custom sizes and colours (translucent and opaque) available on request subject to minimum order quantity

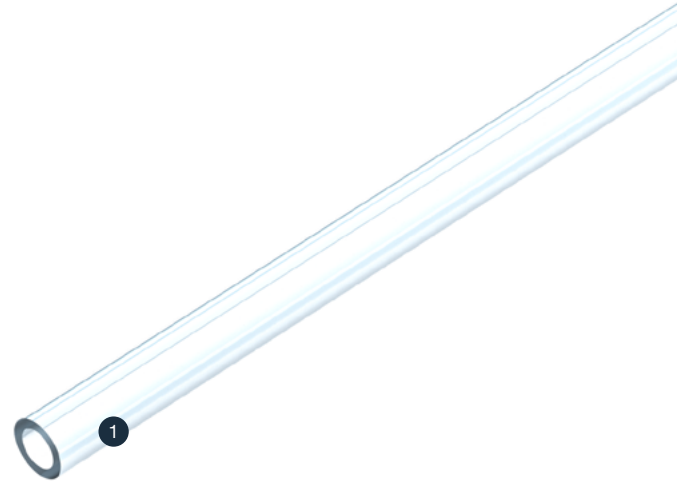


## 1. Phthalate free PVC



## Applications:

- Medical
- Scientific
- Pharmaceutical
- Industrial

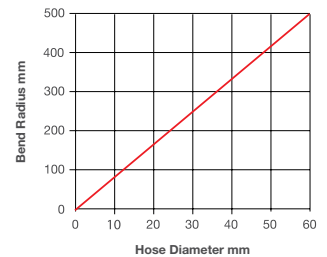

Product Ref	Internal Diameter	External Diameter	Weight per Meter	Bend Radius
C03/6	3 mm	6 mm	0.030 Kg	54 mm
C04/6	4 mm	6 mm	0.023 Kg	54 mm
C05/8	5 mm	8 mm	0.035 Kg	72 mm
C06/9	6 mm	9 mm	0.044 Kg	81 mm
C08/11	8 mm	11 mm	0.065 Kg	99 mm
C08/14	8 mm	14 mm	0.139 Kg	126 mm
C09/12	9 mm	12 mm	0.060 Kg	48 mm
C10/13	10 mm	13 mm	0.078 Kg	117 mm
C10/16	10 mm	16 mm	0.164 Kg	144 mm



Product Ref	Internal Diameter	External Diameter	Weight per Meter	Bend Radius
C12/15	12 mm	15 mm	0.092 Kg	135 mm
C12/18	12 mm	18 mm	0.163 Kg	162 mm
C16/19	16 mm	19 mm	0.122 Kg	171 mm
C16/22	16 mm	22 mm	0.220 Kg	198 mm
C19/22	19 mm	22 mm	0.151 Kg	198 mm
C19/25	19 mm	25 mm	0.262 Kg	225 mm
C22/28	22 mm	28 mm	0.325 Kg	252 mm
C25/31	25 mm	31 mm	0.320 Kg	279 mm
C32/38	32 mm	38 mm	0.402 Kg	241 mm



Product Ref	Internal Diameter	External Diameter	Weight per Meter	Bend Radius
C32/42	32 mm	42 mm	0.640 Kg	378 mm
C38/44	38 mm	44 mm	0.471 Kg	323 mm
C38/48	38 mm	48 mm	1.000 Kg	432 mm
C50/59	50 mm	59 mm	0.940 Kg	387 mm
C50/61.5	50 mm	61.5 mm	1.208 Kg	554 mm
C60/72	60 mm	72 mm	1.518 Kg	432 mm
C76/88	76 mm	80 mm	1.886 kg	645 mm