


# RUBBER WATER HOSE

## RWH Series

Copely



A black heat, ozone and weather resistant EPDM rubber hose for conveying hot and cold water in all applications.

Manufactured from heat resistant EPDM rubber with high tensile synthetic textile reinforcement. Black, smooth, flexible rubber hose specially designed for refrigerants.

For use throughout industry where engine cooling with closed cooling systems is required. Capable of withstanding hot oil spray where this applies. Normally installed using hose clamps. Suitable for use at temperatures from -40°C to +120°C. Compliant with SAEJ 20 R3.

### Key Features:

- EPDM Rubber.
- Wide temperature range.
- SAEJ20 R3 compliant.
- Service temperature -40°C to +120°C.

### Sizes:


Available in 20 m coils  
10 mm - 25 mm ID

### Colours:

Black



1. EPDM Rubber inner
2. Polyester fibre reinforcement
3. EPDM Rubber outer

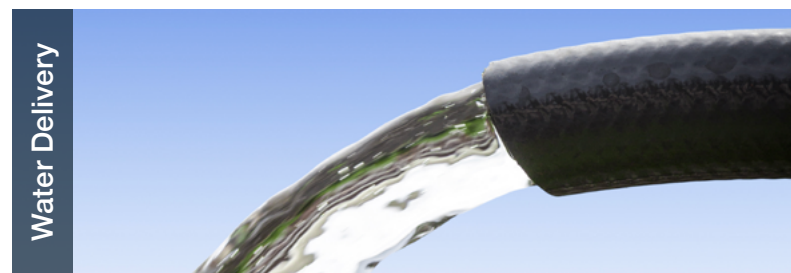

### Applications:

- Water delivery hose
- Industrial use



Product Ref	Internal Diameter	External Diameter	Maximum Working Pressure	Minimum Burst Pressure	Weight per Metre	Bend Radius (Approx.)
RWH10	10 mm (3/8")	17 mm	10 Bar	30 Bar	0.29 Kg	70 mm
RWH13	13 mm (1/2")	20 mm	10 Bar	30 Bar	0.43 Kg	85 mm
RWH19	19 mm (3/4")	28 mm	10 Bar	30 Bar	0.7 Kg	170 mm
RWH25	25 mm (1")	34 mm	10 Bar	30 Bar	1 Kg	250 mm