

SPIRALFLEX HD

SPH Series



Offers quick and simple protection to all types of hydraulic and pneumatic hoses. A cost-effective solution to shocks, abrasion and deterioration, helping reduce equipment downtime and maintenance costs.

Easily deployed to new or existing hydraulic and pneumatic assemblies, without the use of any tools.

Key Features:

- Simple to use with one or several hoses.
- Smooth rounded edges prevent damage to hose assemblies or equipment during installation and use.
- Can withstand a temperature range -40°C to +138°C.
- Suitable for contact with hydraulic fluids including glycol and phosphate based products.

Sizes:

Available in 20 m and 50 m coils

Colours:


Black, red and yellow

Other colours are available upon request

Packaging:

Supplied boxed for ease of handling.

Copely

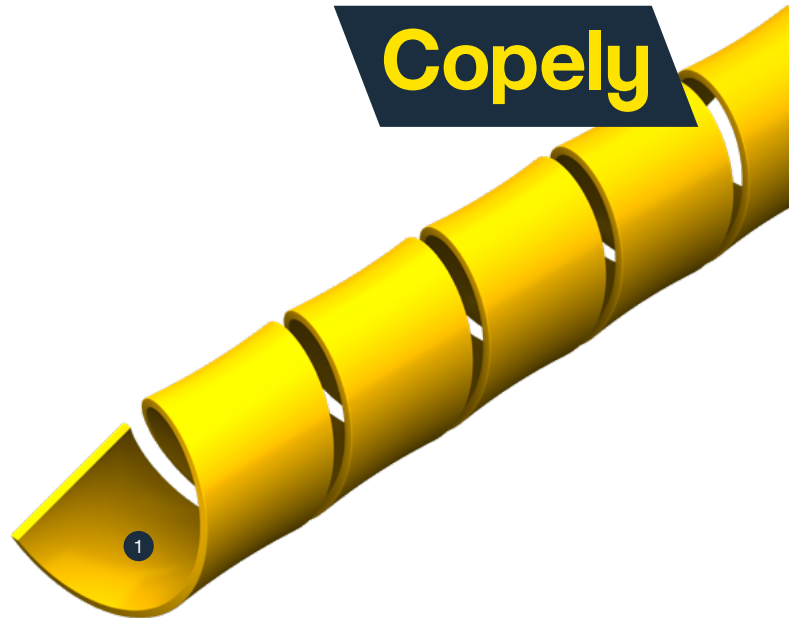

1. High Density Polyethylene (HDPE)



Applications:

- Hydraulic
- Pneumatic
- Paint spray
- Chemical or industrial hoses



Product Ref	Size Range	External Diameter	Wall Thickness	Weight per coil	Coil Length
SPH16/50	11.5-16 mm	16 mm	1.5 mm	2.9 Kg	50 m
SPH20/50	14-20 mm	20 mm	1.8 mm	5.1 Kg	50 m
SPH25/50	20-25 mm	25 mm	2.0 mm	6.4 Kg	50 m
SPH32/50	25-32 mm	32 mm	2.4 mm	11.5 Kg	50 m
SPH40/50	32-40 mm	40 mm	2.4 mm	13.4 Kg	50 m
SPH50/20	38-50 mm	50 mm	3.0 mm	8.5 kg	20 m
SPH63/20	50-63 mm	63 mm	3.5 mm	12.6 Kg	20 m
SPH75/20	60-75 mm	75 mm	3.8 mm	16.3 Kg	20 m